



DOMINGOTM
Build the heaven... TILES

L I V E
Y O U R
T I L E S

ABOUT US

Domingo tile is predominant in ceramic industries. Doing Something versatile -"To deliver better than best". We Constantly endeavour to bring you the best collection of wall & floor tiles that blend with diverse architectural needs by innovation through investing in latest technology make Domingo tiles apart from the rest.

We are located in Morbi, which is the most promising ceramic tiles manufacturing hub of India. The company was established with the objective of delivering the best products in wall & floor tiles, making dream spaces in real world. Now serving over the world. Domingo has an exclusive product range where a customer can get exclusive designs & more choices at one place. Our products lead the market because of exquisite premium designs, High sorted quality standards, premium packaging, advanced automatic production and logistic planning, competitive rate, long-lasting life, and extensive range.

OUR VISION

To become a prominent brand in flooring industry by consistent quality parameters, constant innovations in the field of different designs & surface finishes, maintaining trust by having strict quality standards & readymade system enrich from real world experiences in the business. Using superior design and innovation, teamwork, ethics, and sustainability that satisfy international customer's needs.

OUR MISSION

We will continue to explore a superior products for commercial and residential application through investments in the latest technology and a strong commitment to our customers and the environment.



POLISHED

HIGH GLOSS / SUPER HIGH GLOSS



MATT / SATIN

CARVING / GLUE MATT


SUGAR

An advanced Italian technology that imparts full potential of porcelain in a product, offering performance and appearances with high application potentials.

Sizes

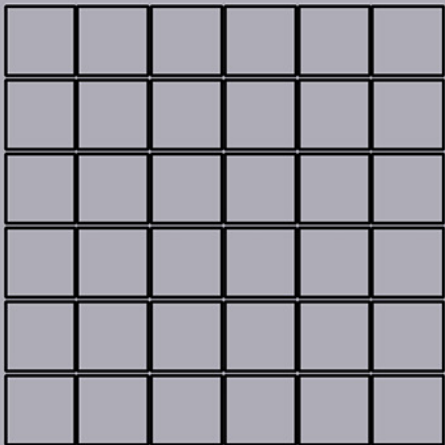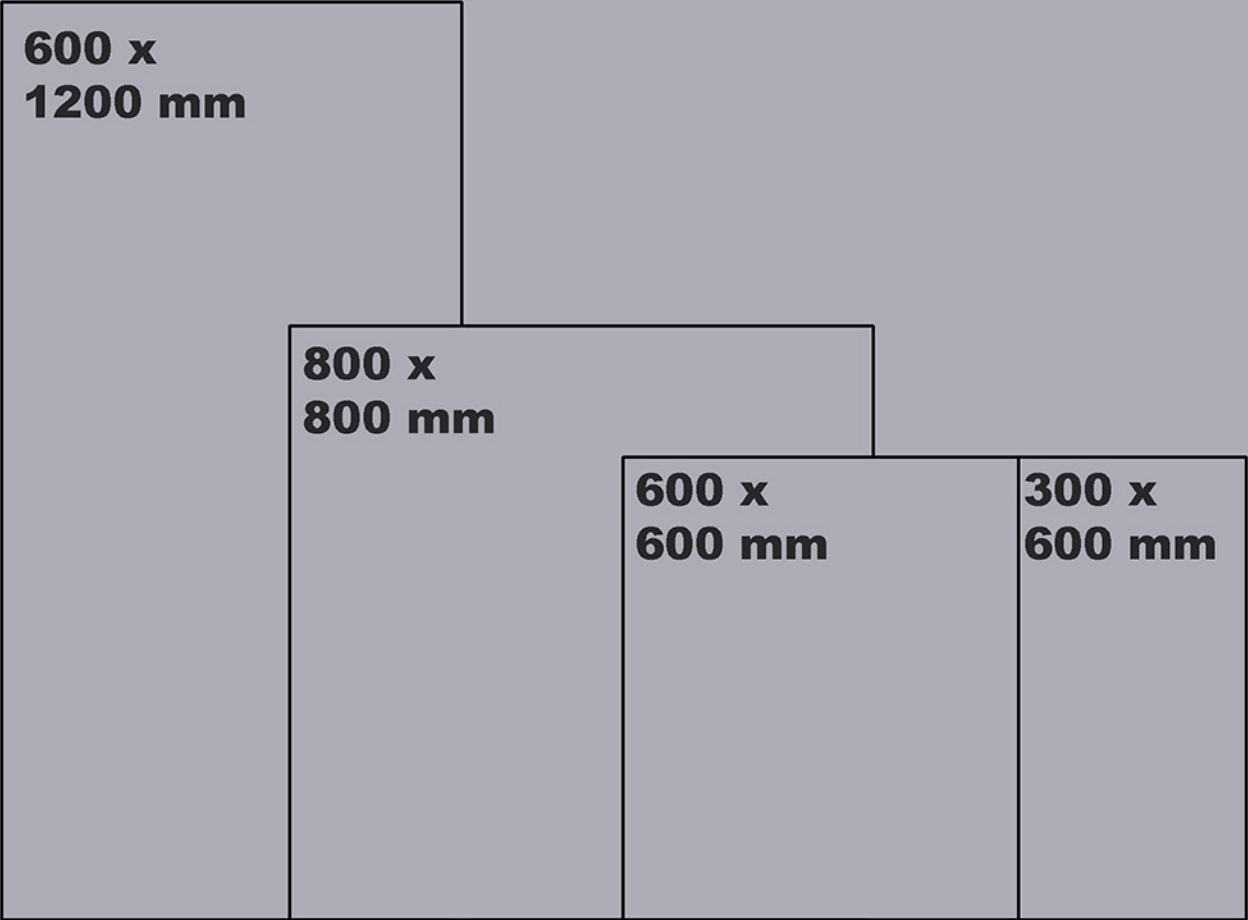

2 inch / 5 cm / 48 mm
Sheet Size : 300 x 300 MM

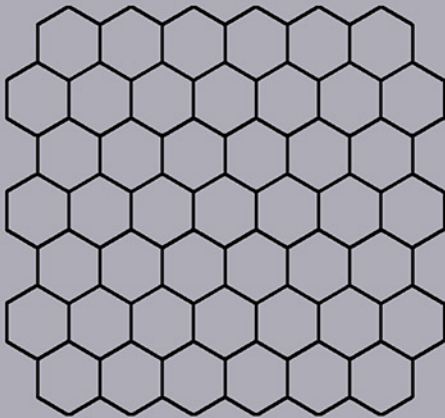

2 inch / 5 cm / 48 mm
Sheet Size : 301 x 298 MM




DT-1001



600x1200 MM

HIGH GLOSS

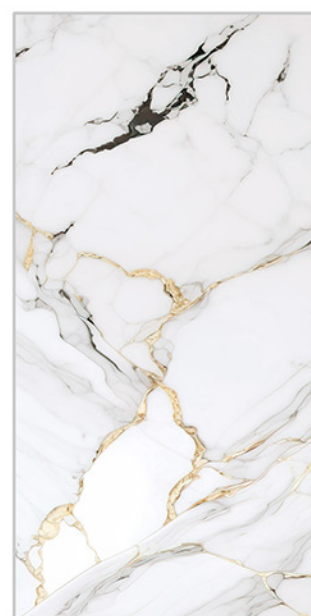

RANDOM 4






DT-1002

600x1200 MM

HIGH GLOSS

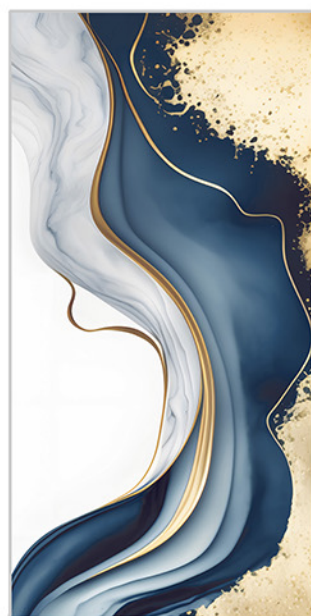

RANDOM 4





DT-1003

• 600x1200 MM

HIGH GLOSS



RANDOM 4







DT-1004

600x1200 MM

HIGH GLOSS

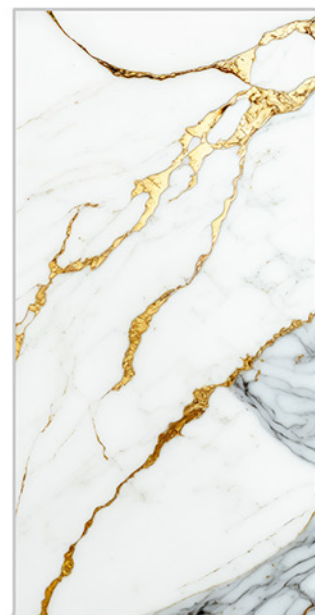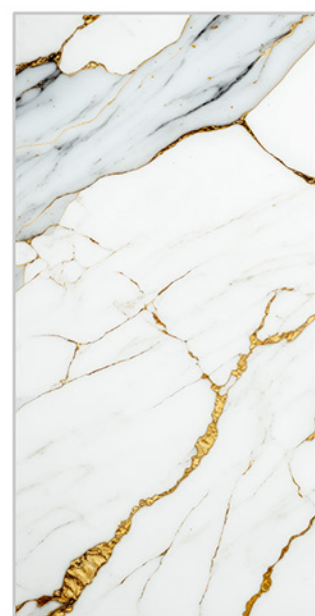


RANDOM 4



DT-1005

600x1200 MM

HIGH GLOSS

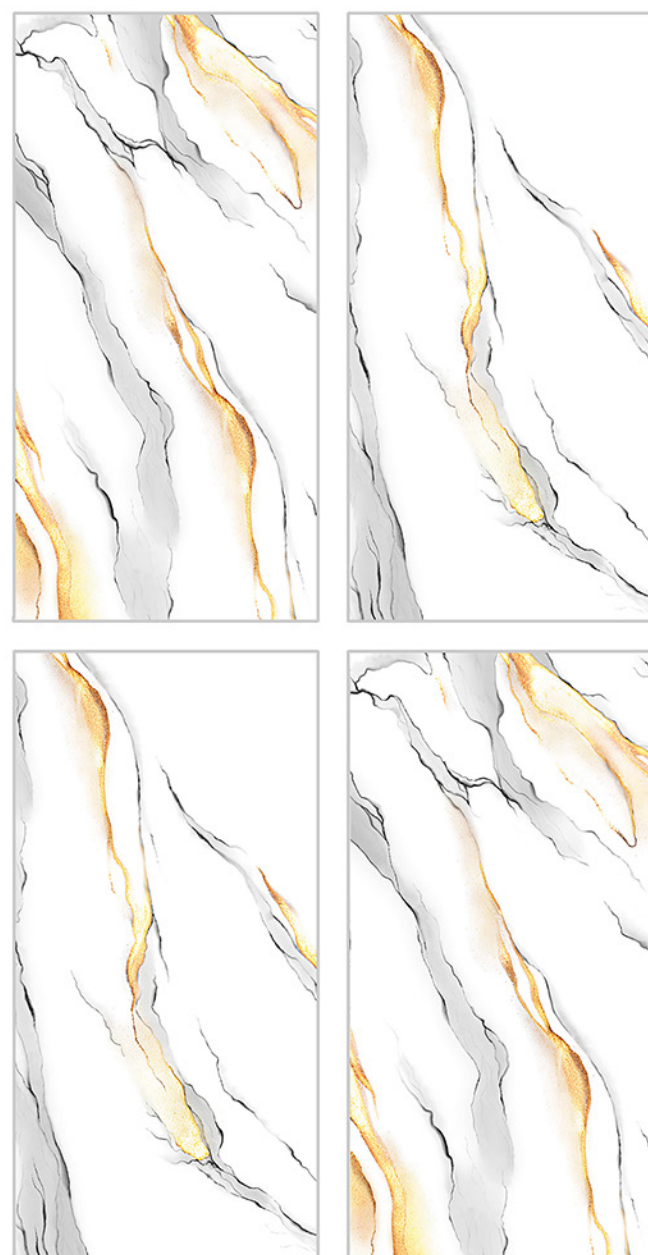

RANDOM 2






DT-1006


600x1200 MM

HIGH GLOSS

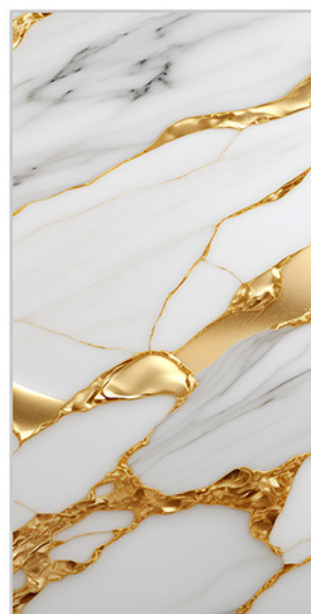

RANDOM 6






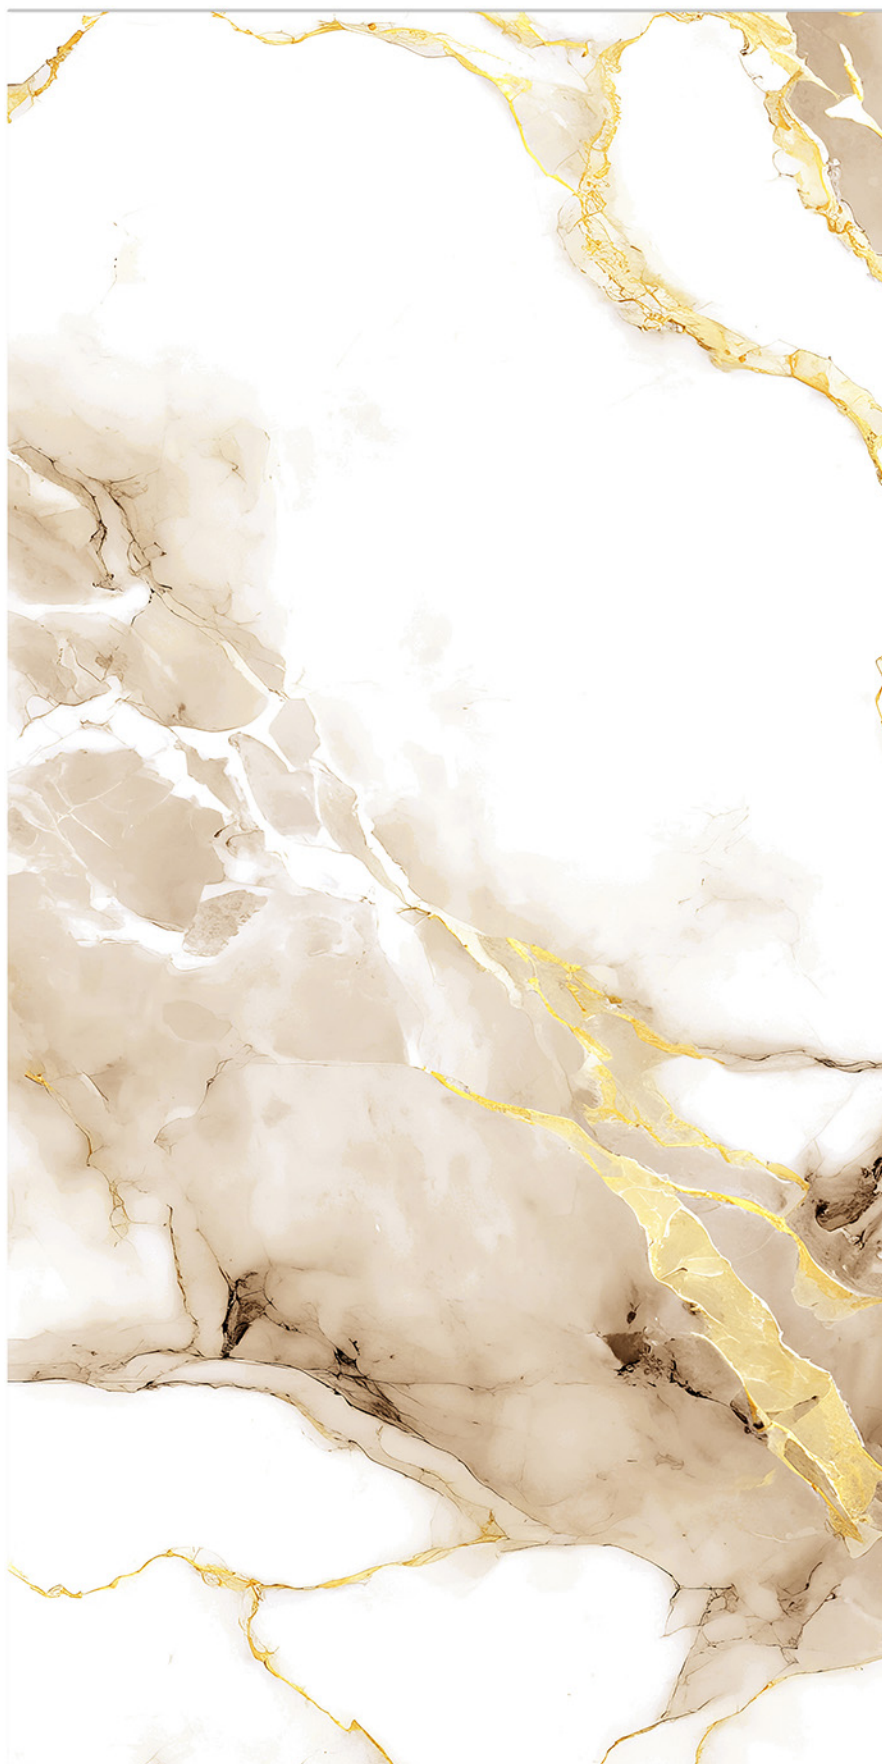



DT-1007


600x1200 MM

HIGH GLOSS

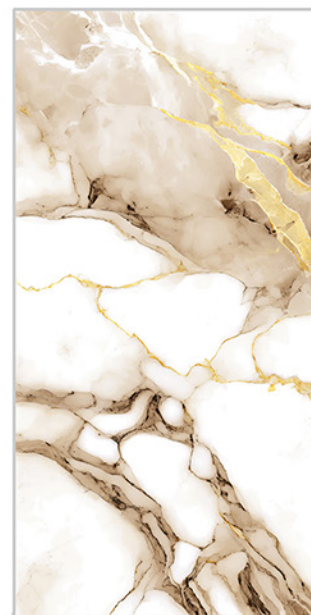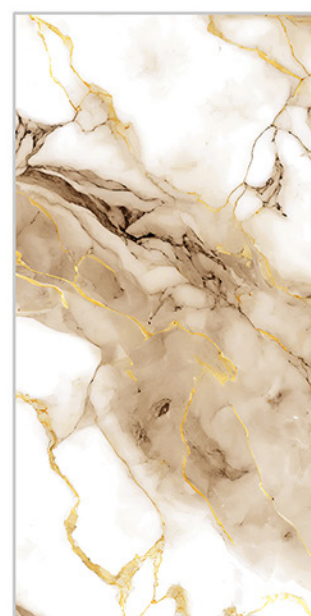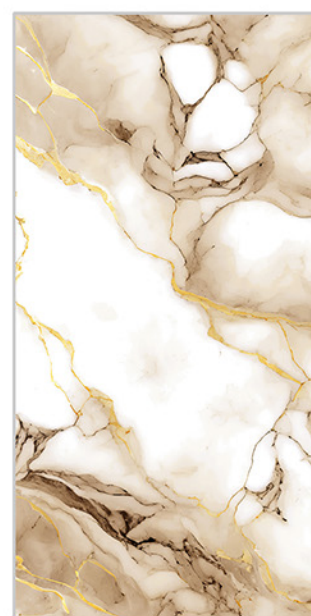

RANDOM 4

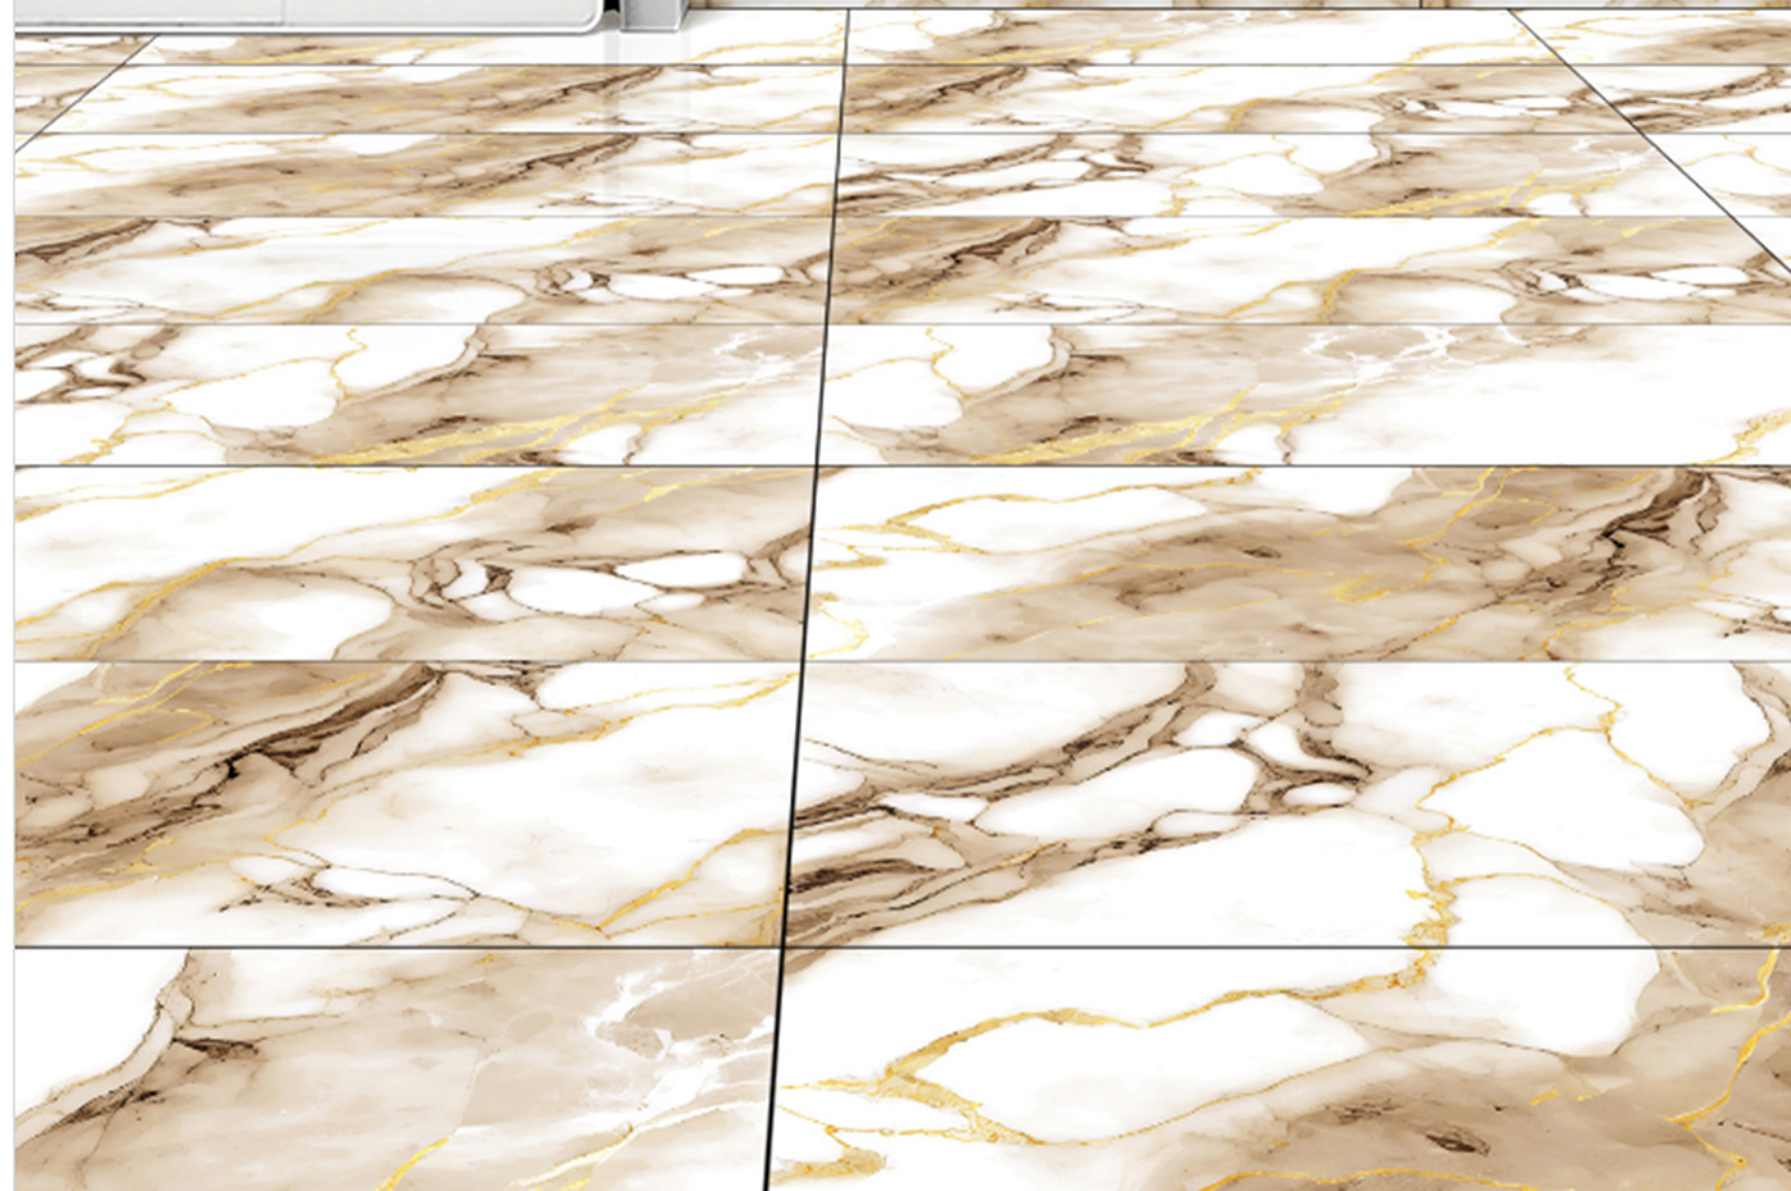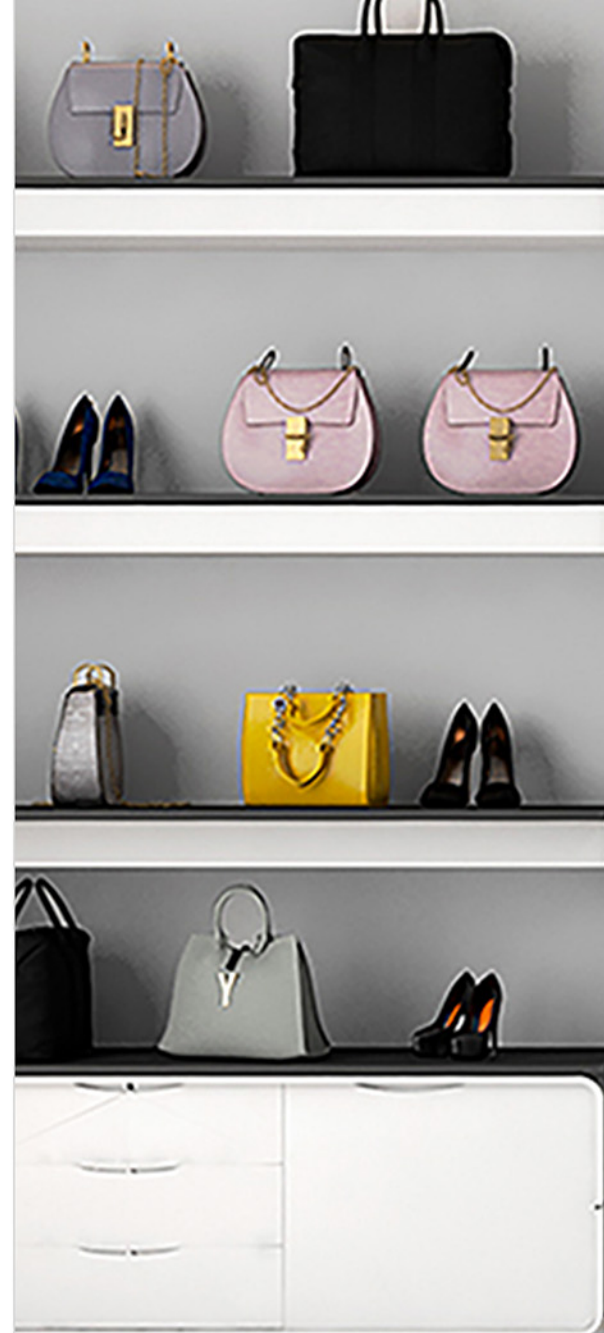




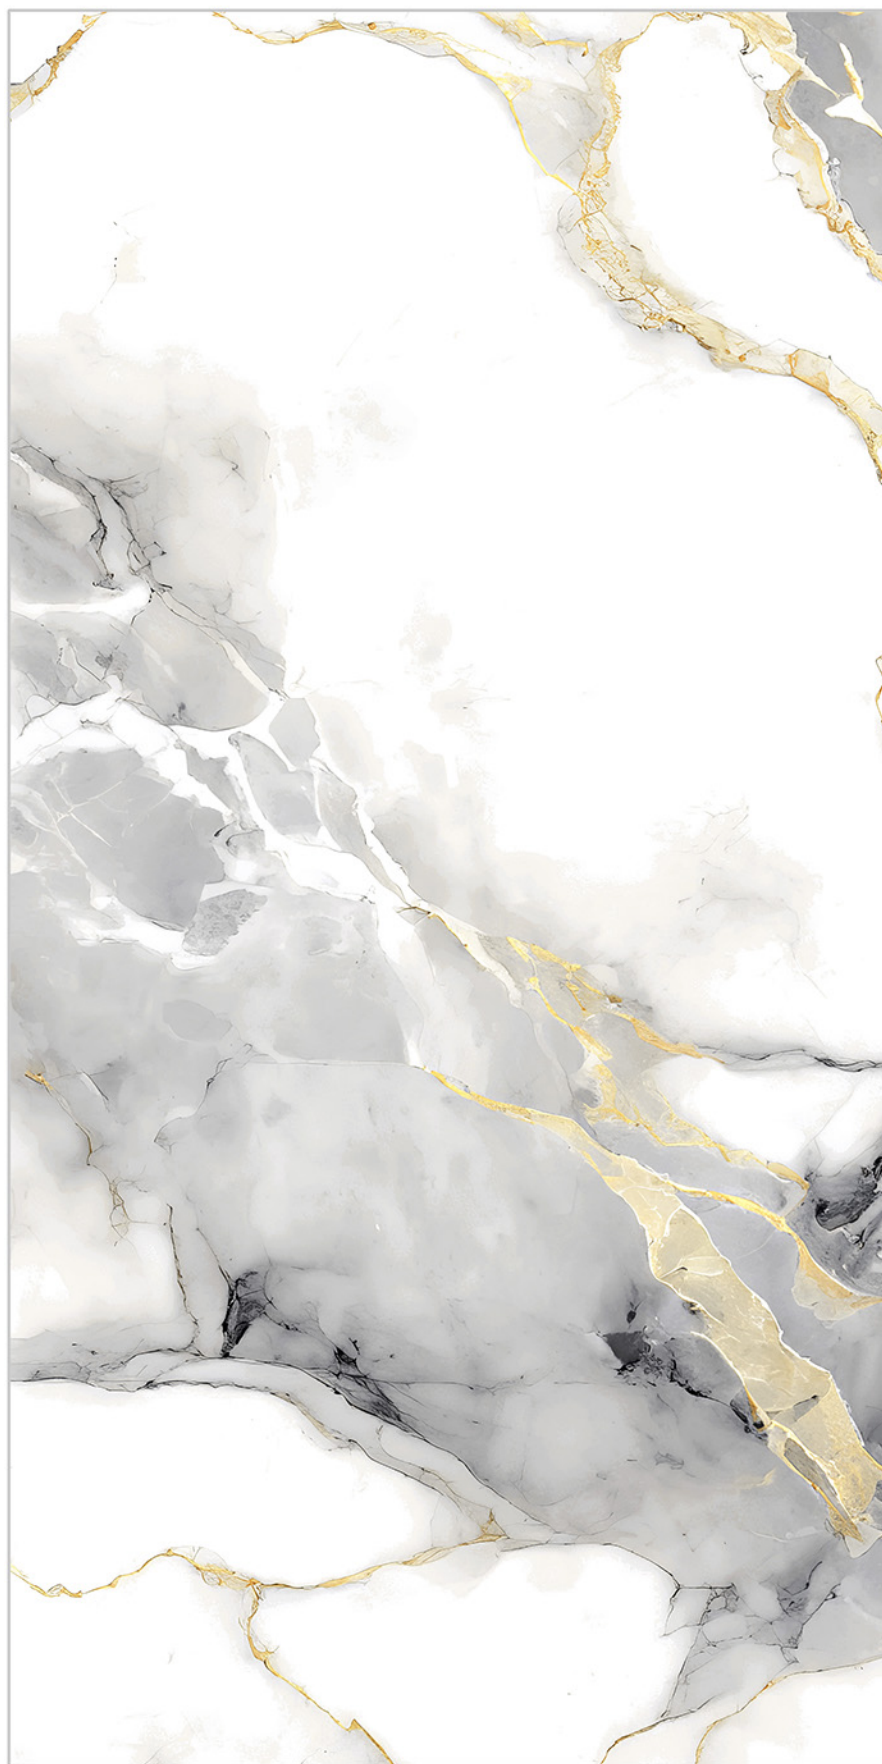


DT-1008



600x1200 MM

HIGH GLOSS

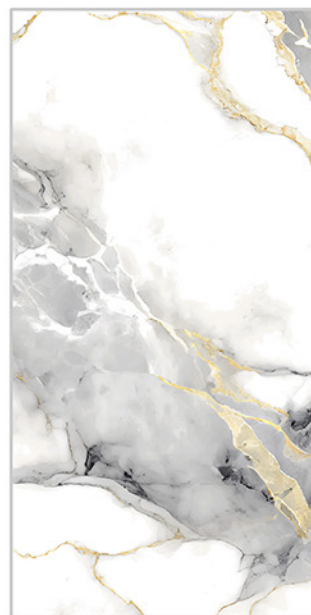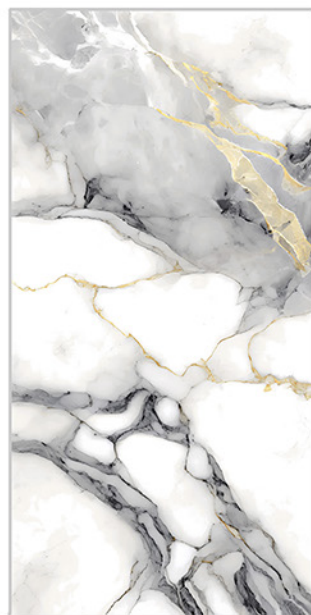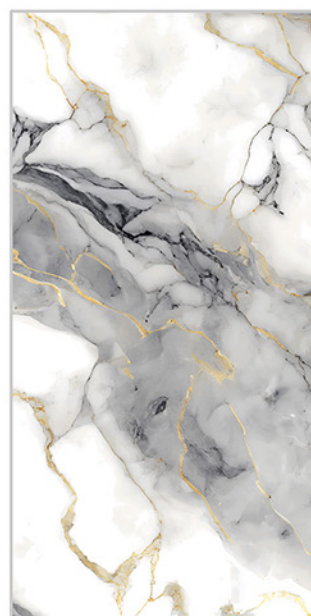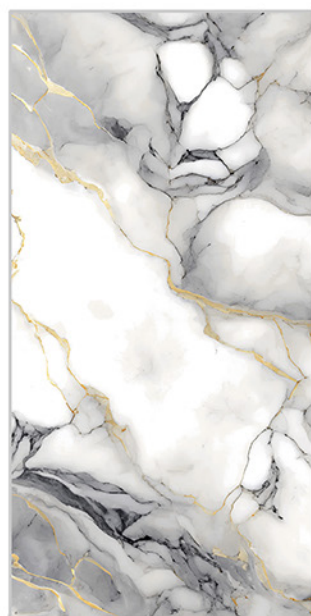

RANDOM 4






DT-1009



600x1200 MM

HIGH GLOSS

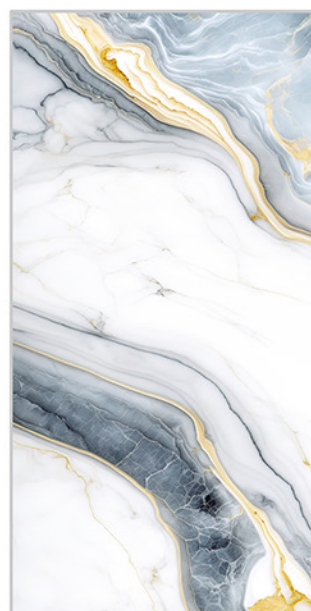

RANDOM 6





DT-1010




600x1200 MM

HIGH GLOSS



RANDOM 2



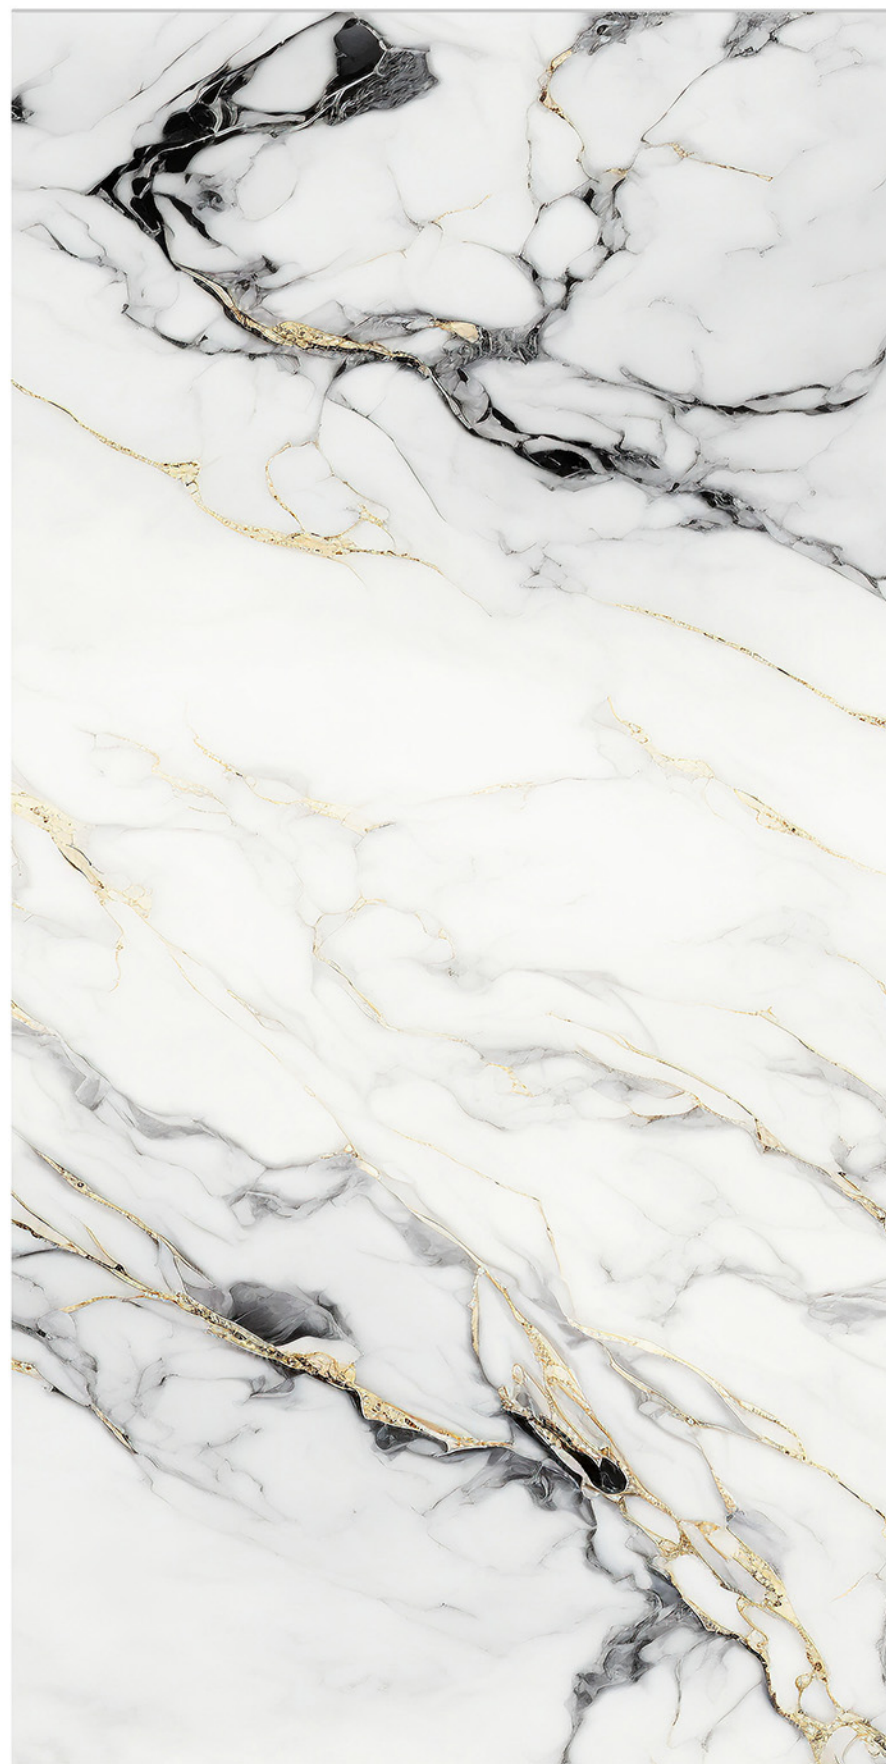

DT-1011

600x1200 MM

HIGH GLOSS



RANDOM 6






DT-1012

600x1200 MM

HIGH GLOSS

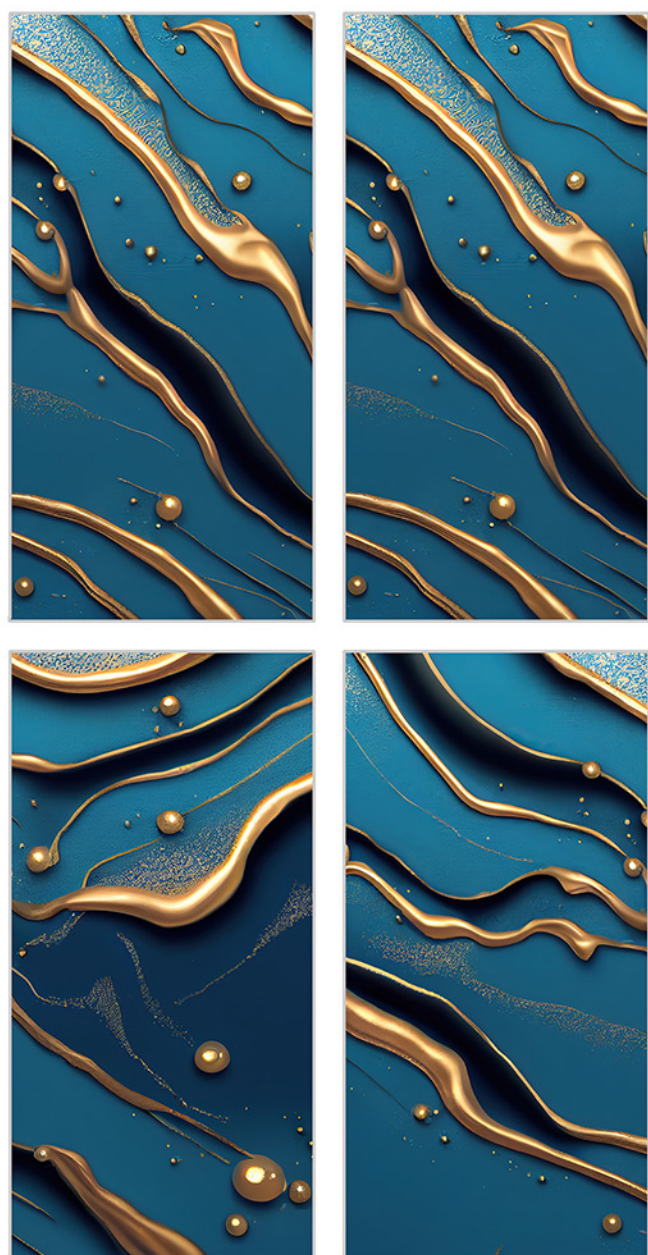

RANDOM 3





DT-1013



600x1200 MM

HIGH GLOSS



RANDOM 4





DT-1014




600x1200 MM

HIGH GLOSS



RANDOM 6






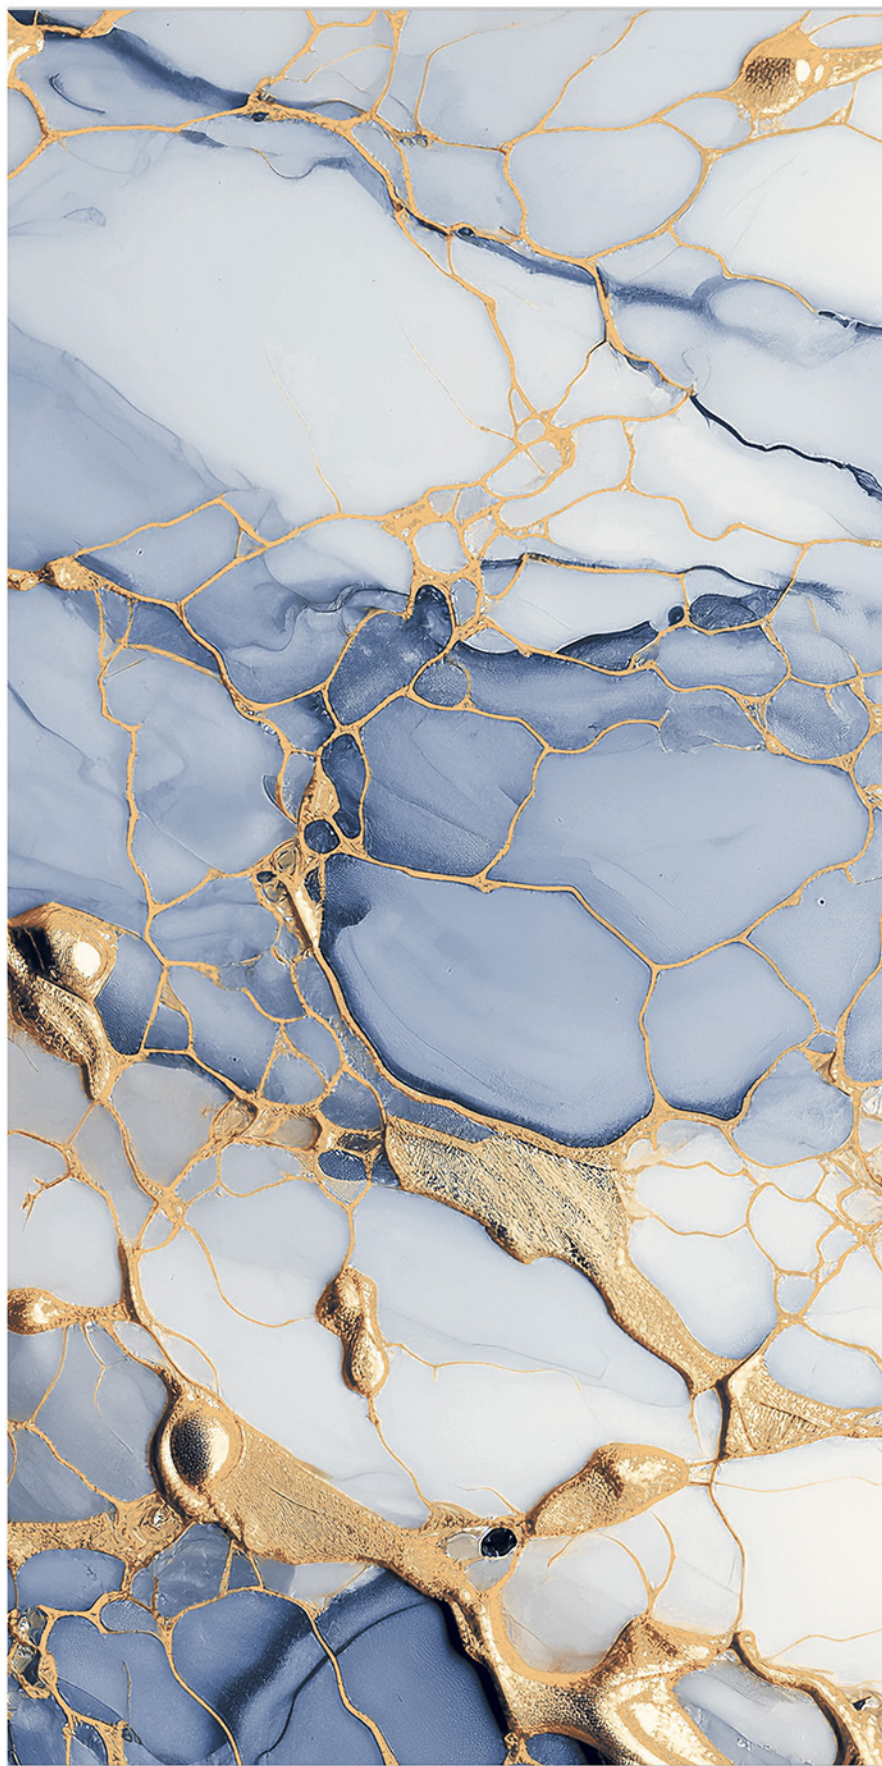


DT-1015


600x1200 MM

HIGH GLOSS

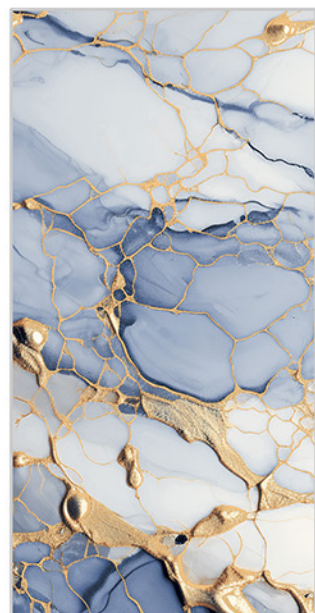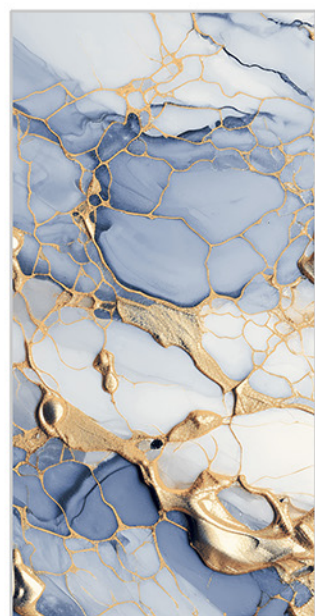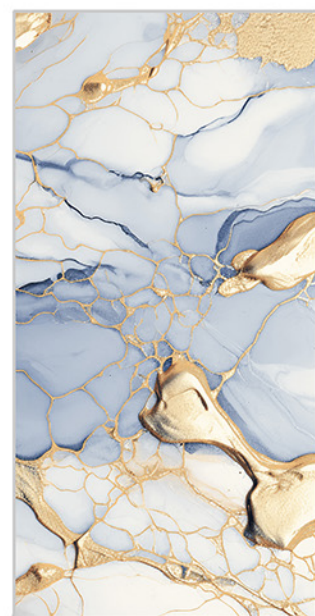

RANDOM 6


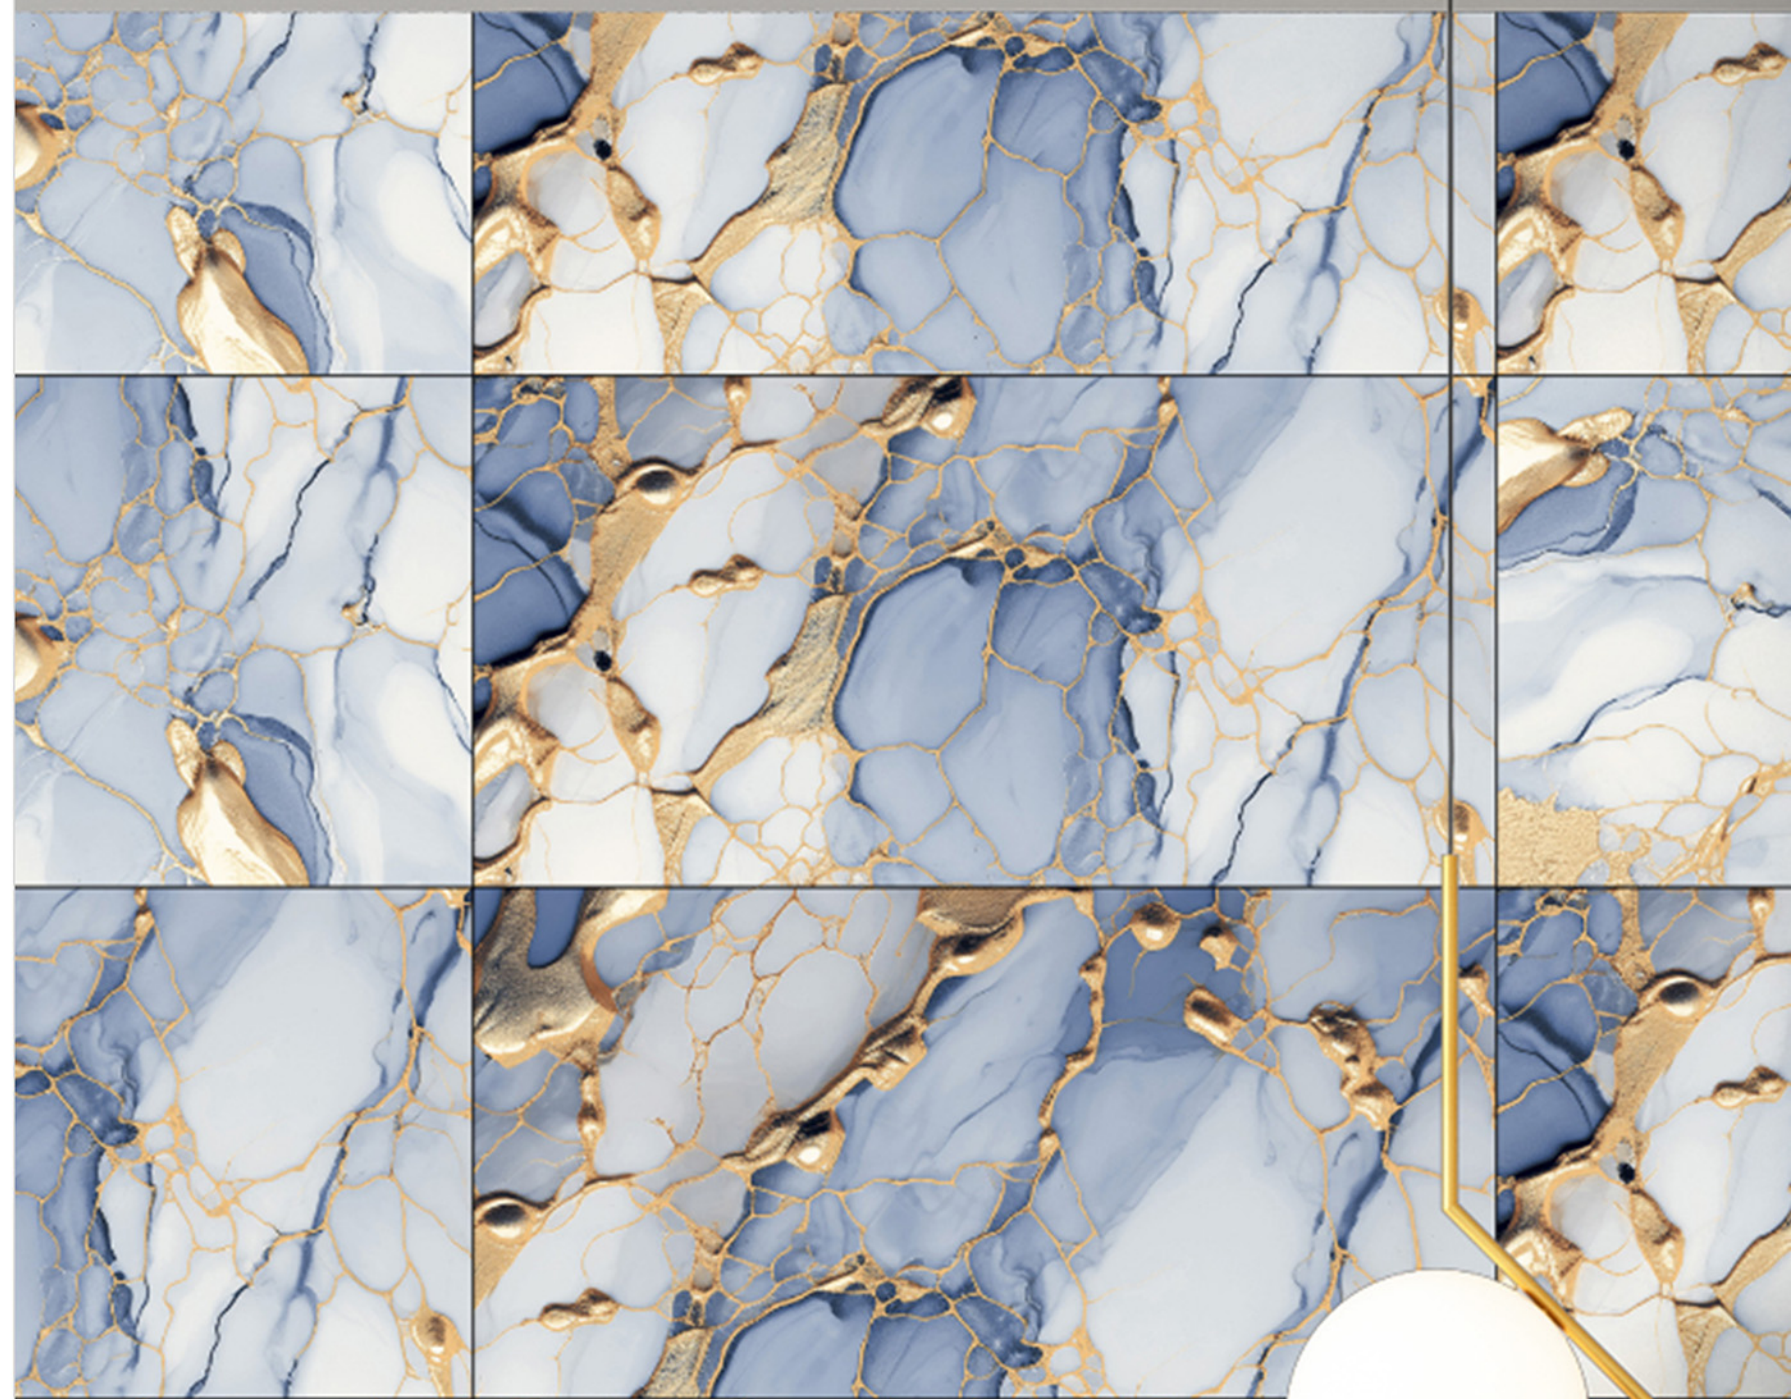


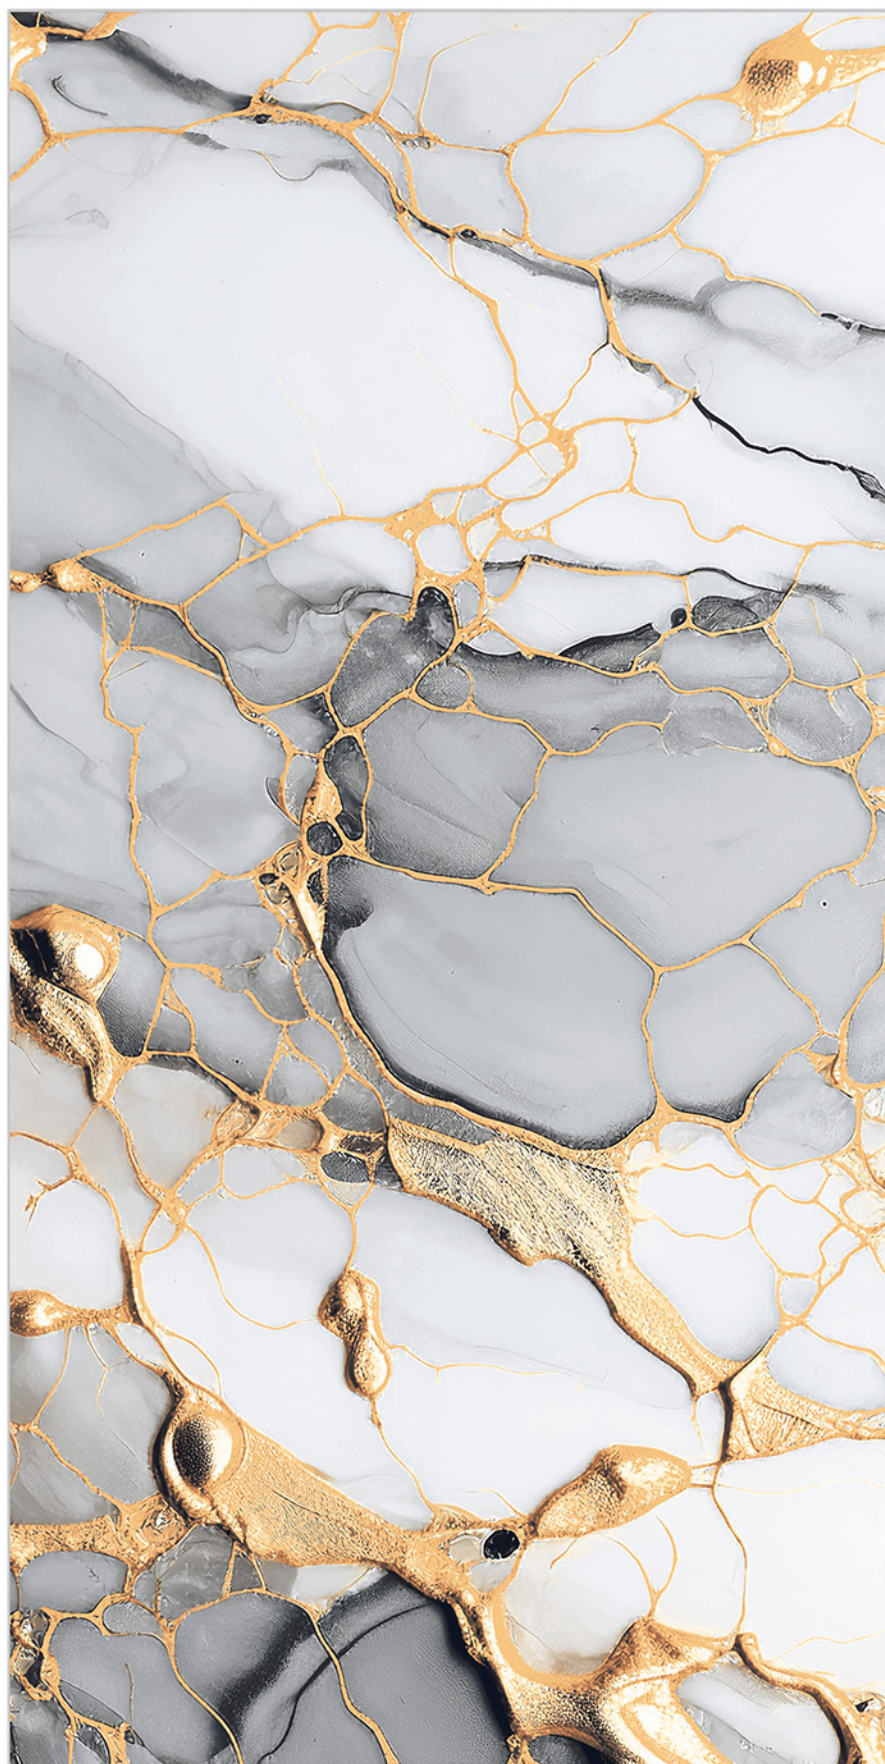

DT-1016


600x1200 MM

HIGH GLOSS

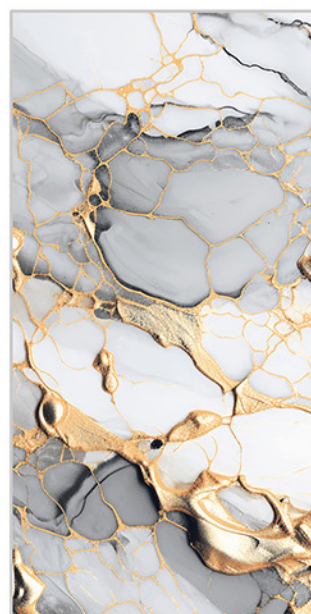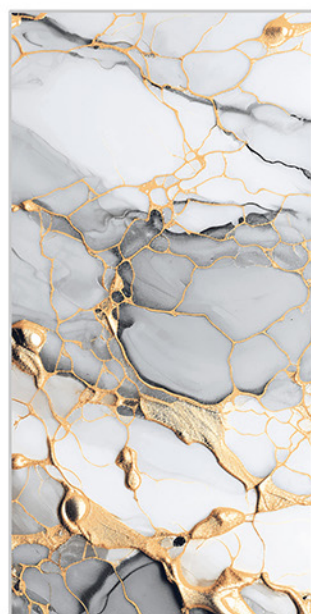

RANDOM 6



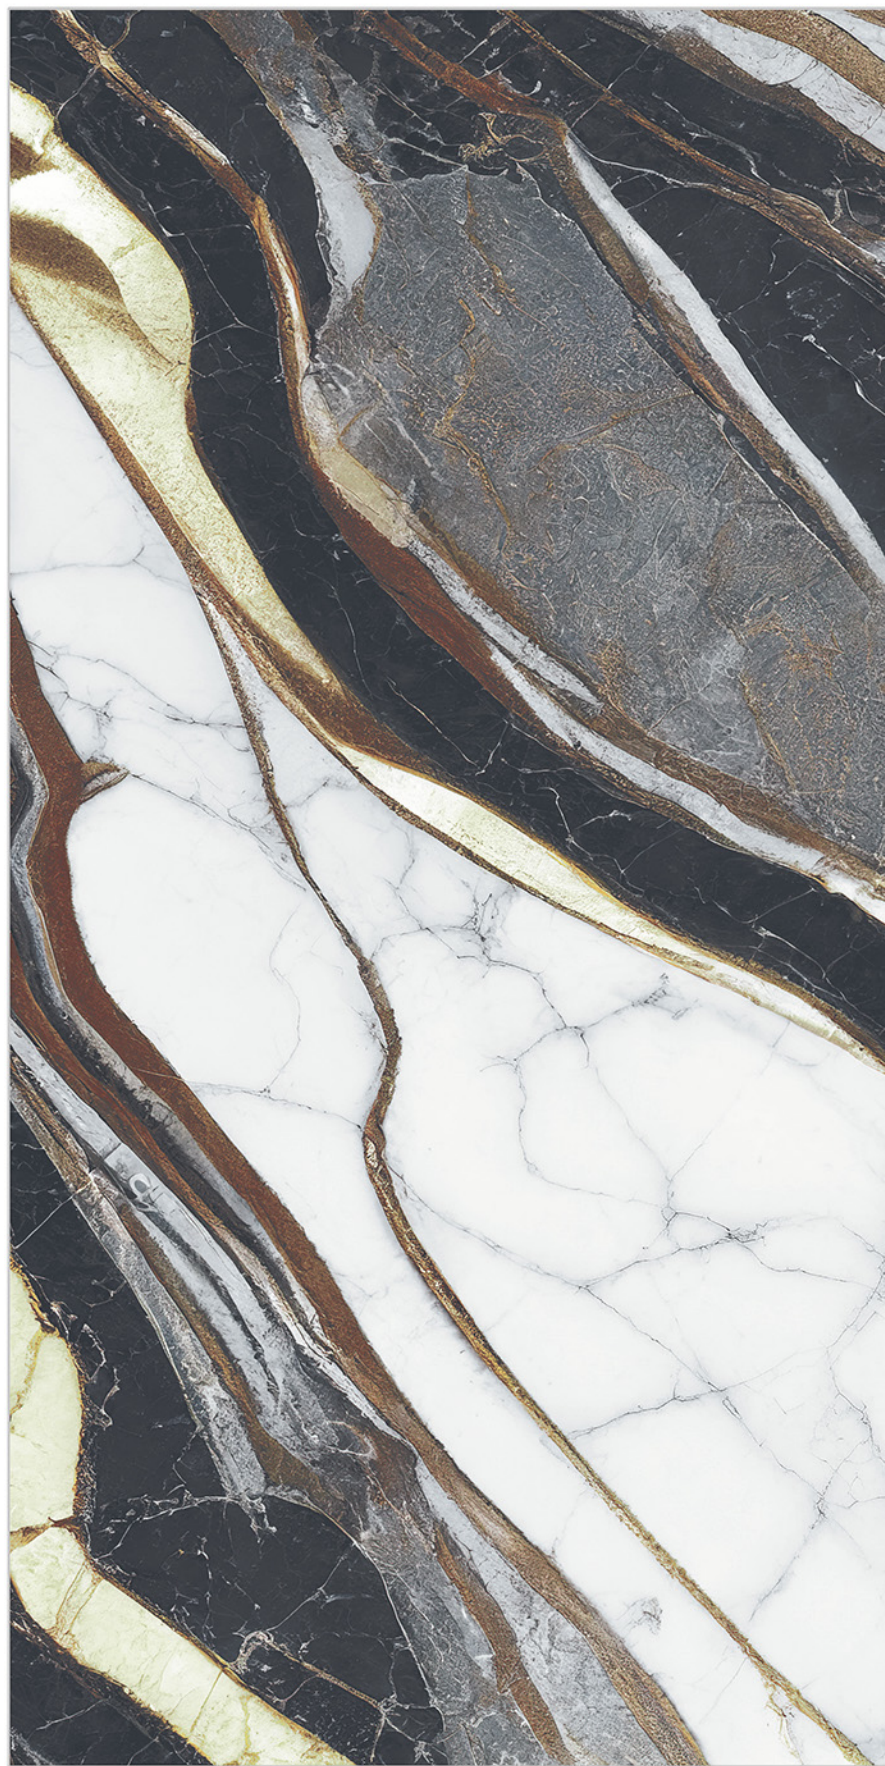


DT-1017



600x1200 MM

HIGH GLOSS

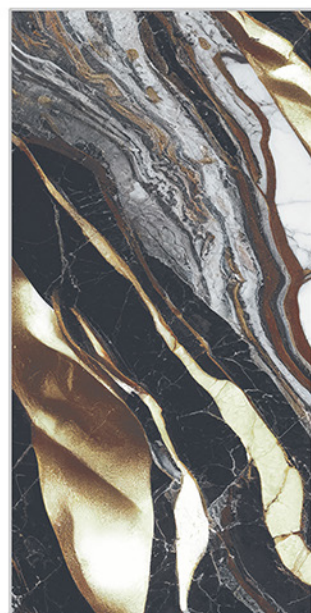

RANDOM 4





DT-1018

600x1200 MM

HIGH GLOSS



RANDOM 4





DT-1019




600x1200 MM

HIGH GLOSS



RANDOM 4




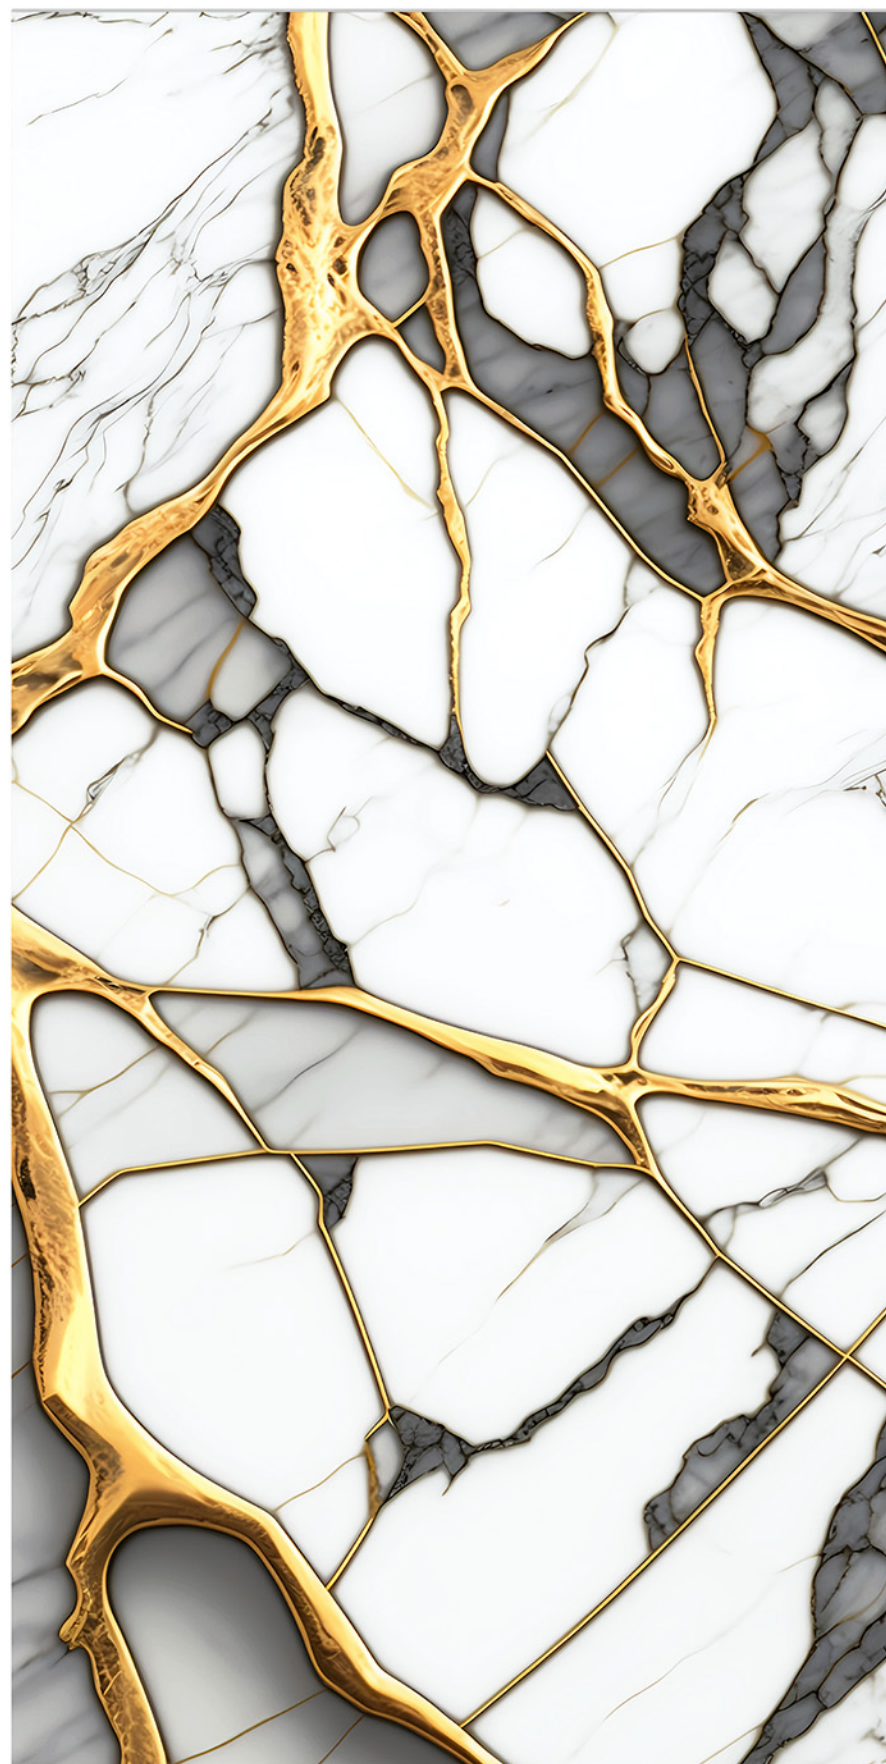

DT-1020

600x1200 MM

HIGH GLOSS

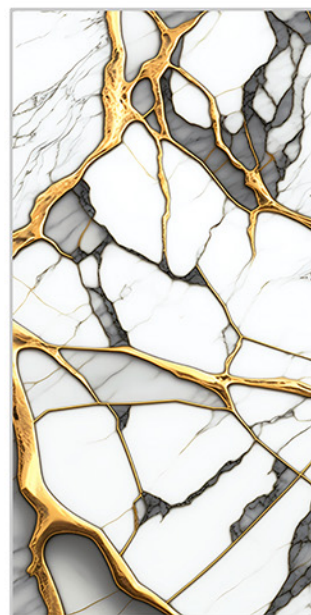

RANDOM 2





DT-1021



600x1200 MM

HIGH GLOSS



RANDOM 2





DT-1022


600x1200 MM

HIGH GLOSS



RANDOM 3





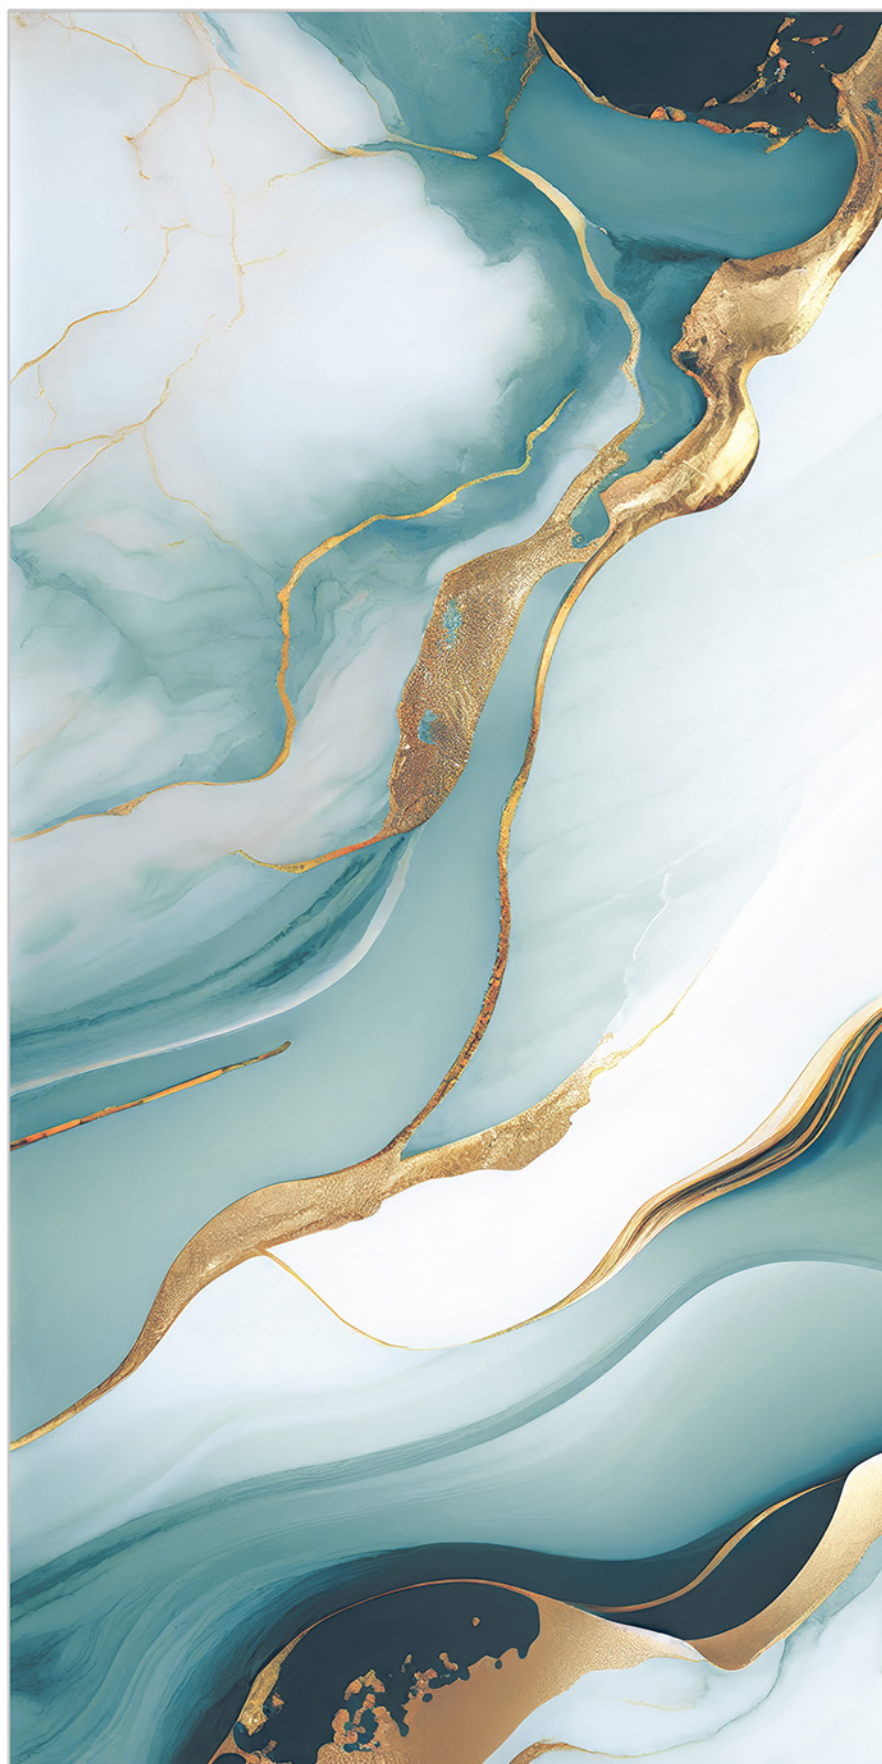

DT-1023


600x1200 MM

HIGH GLOSS

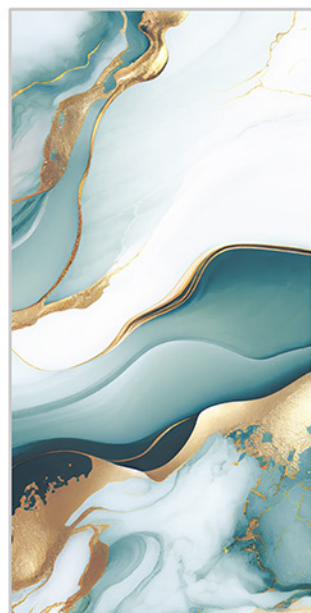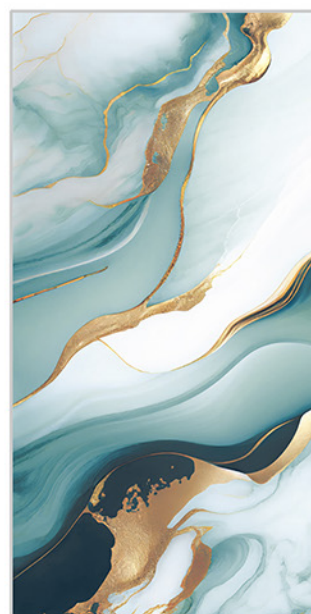

RANDOM 3



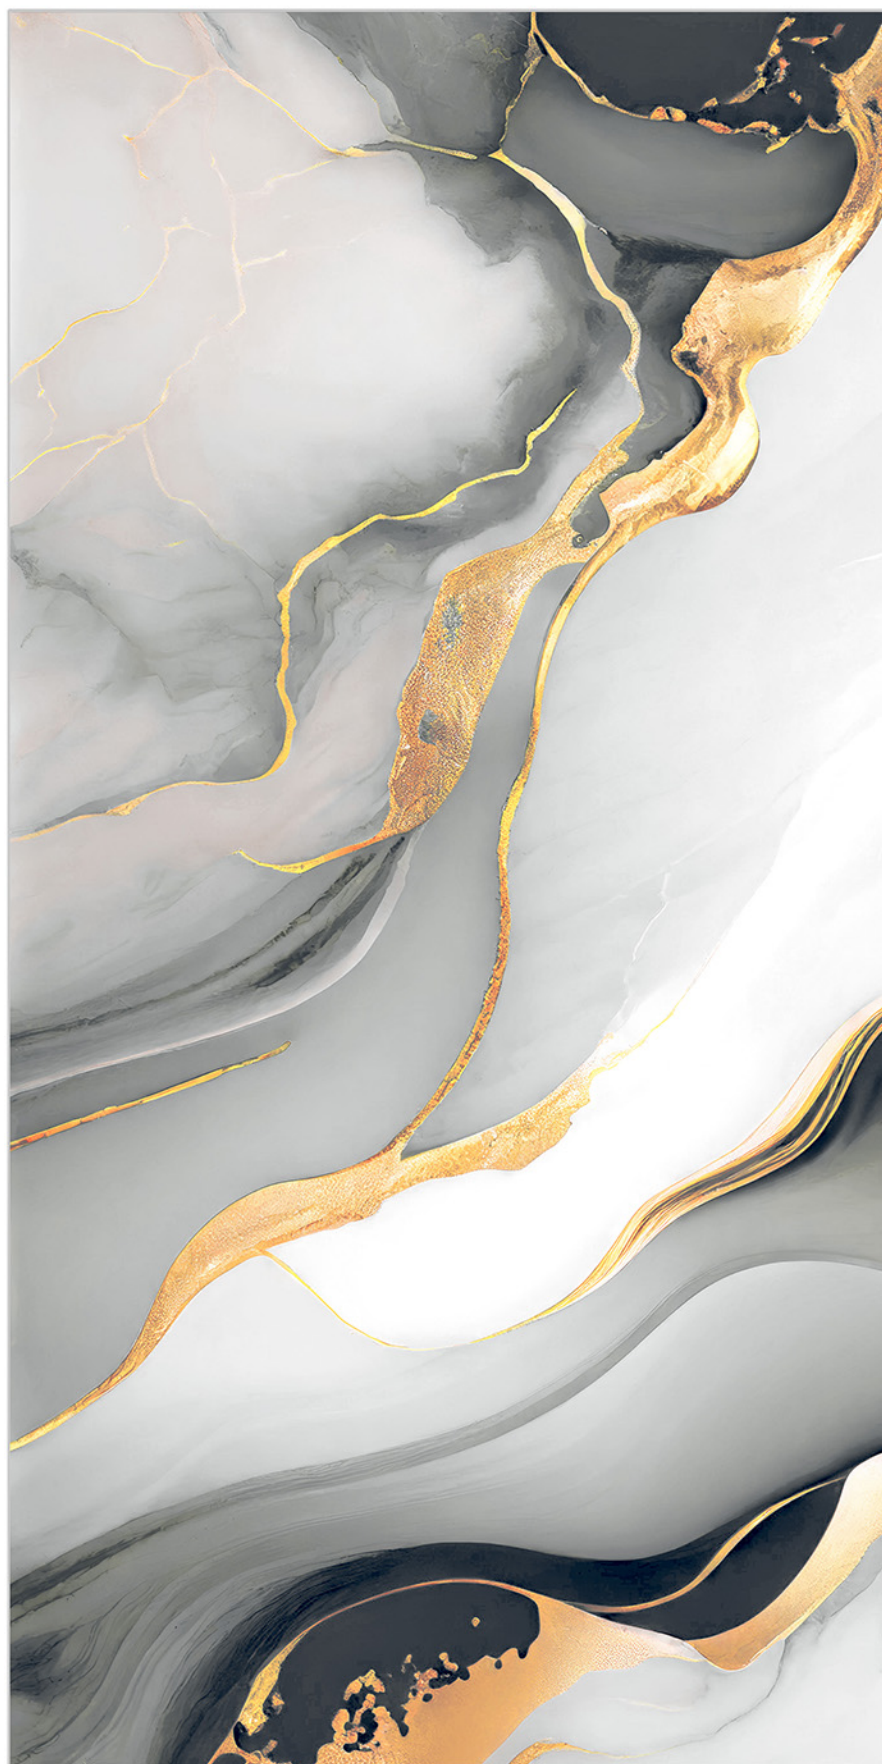


DT-1024




600x1200 MM

HIGH GLOSS

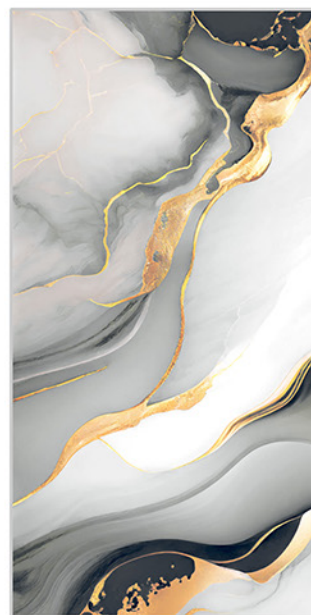

RANDOM 3

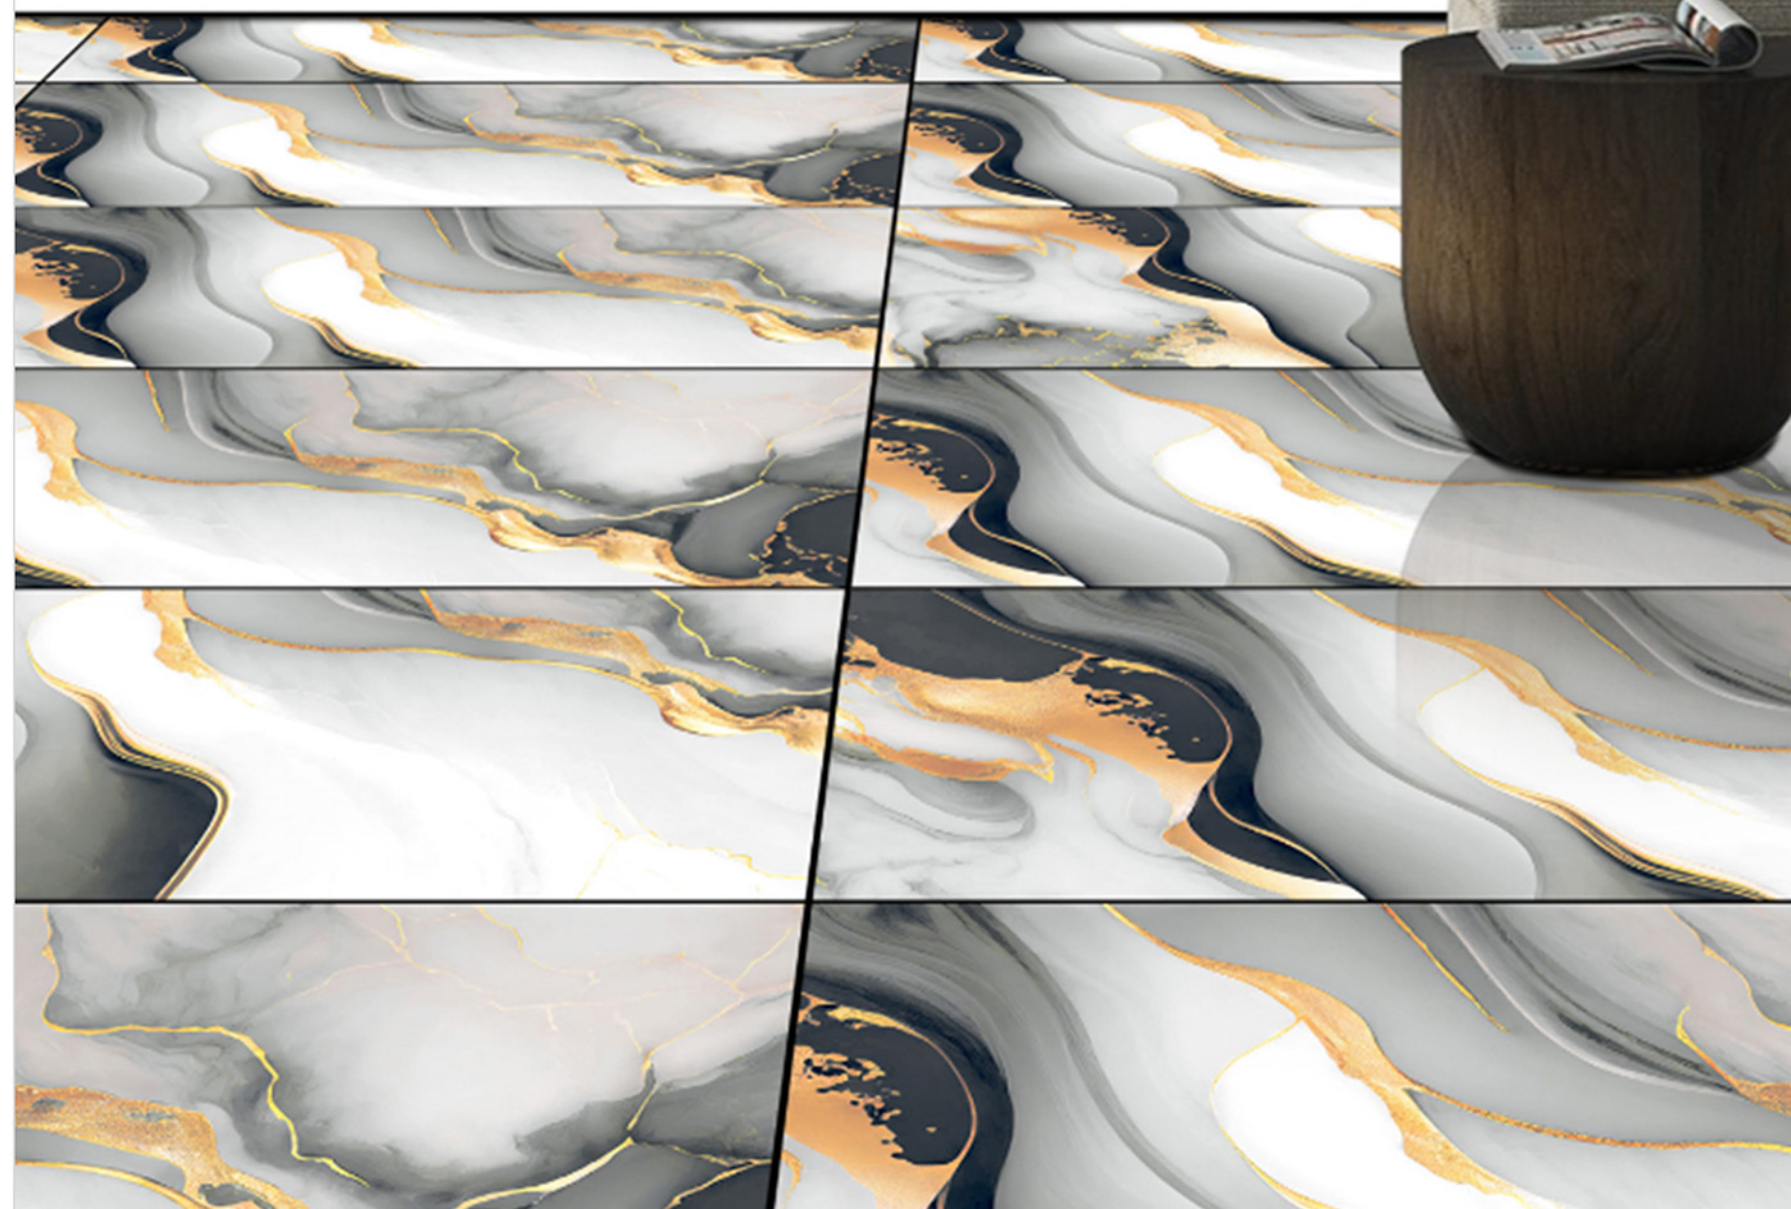



DT-1025


600x1200 MM

HIGH GLOSS



RANDOM 3



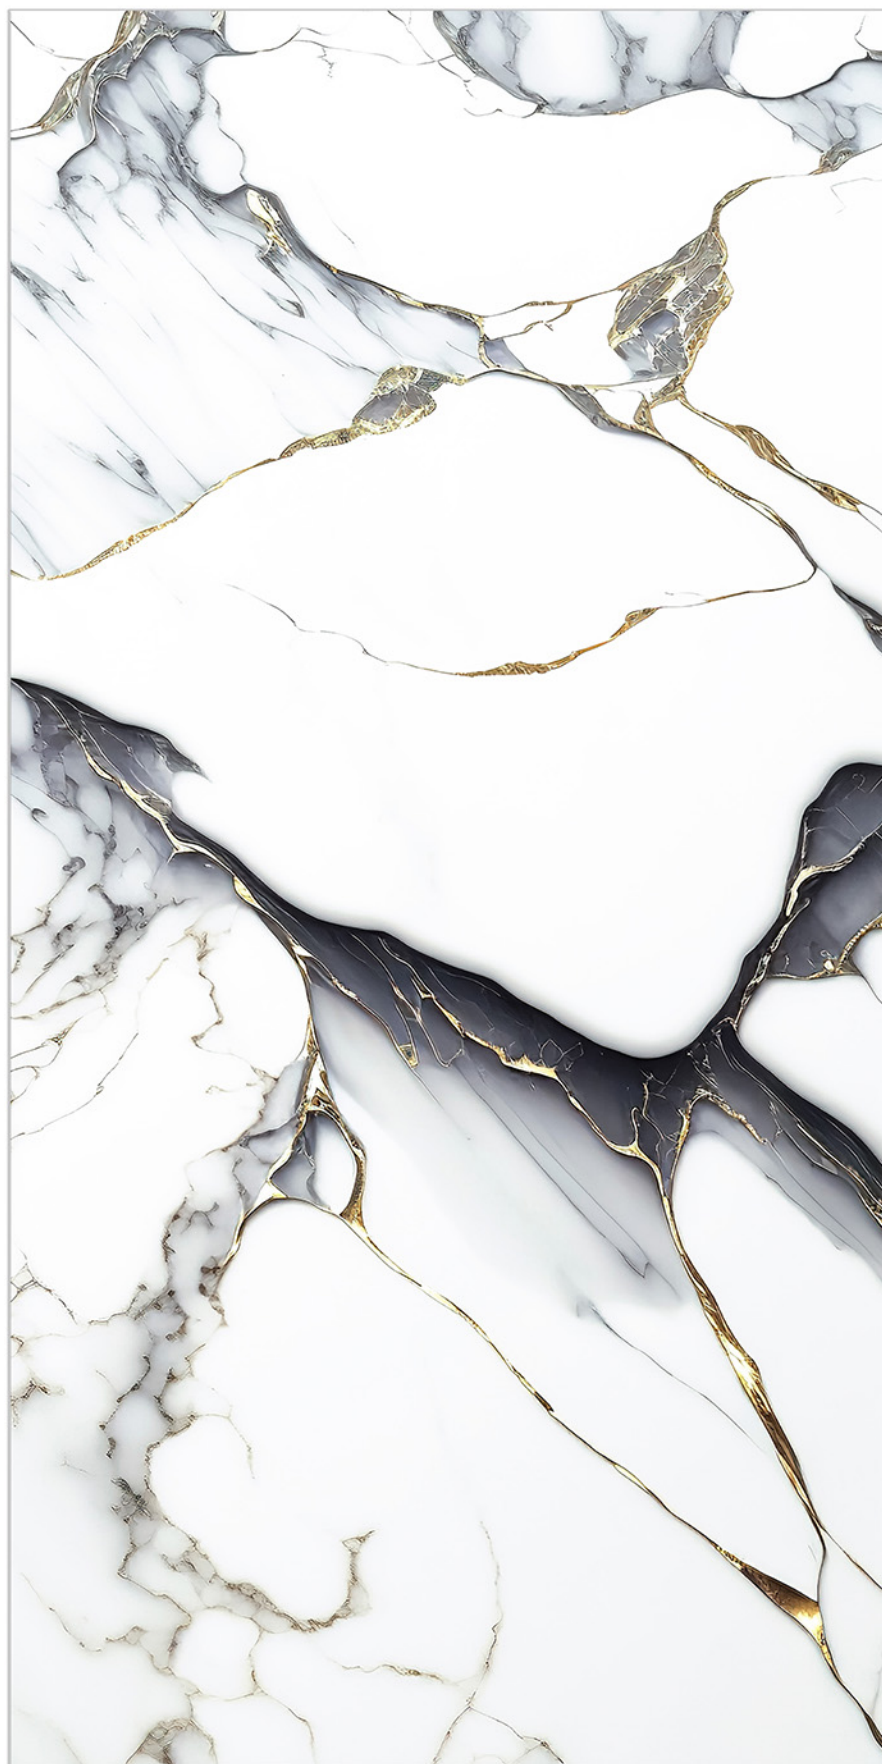

DT-1026

600x1200 MM

HIGH GLOSS



RANDOM 3



TECHNICAL SPECIFICATIONS

CHARACTERISTICS	TEST METHOD	INTERNATIONAL STD EN14411 :2016 Bla	DOMINGO VALUE
DIMENSION & SURFACE QUALITY			
Deviation In Lenth & Width	EN ISO - 10545 - 2	±0.6%	±0.1%
Deviation In Thickness	EN ISO - 10545 - 2	±5%	±3%
Straightness Of Sides	EN ISO - 10545 - 2	±0.5%	±0.1%
Rectangularity	EN ISO - 10545 - 2	±0.5%	±0.1%
Surface Flatness	EN ISO - 10545 - 2	±0.5%	±0.1%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	EN ISO - 10545 - 3	<0.5%	<0.05%
Mohs Hardness	EN - 101	Min.5	Min.5
Flexural Strength	EN ISO - 10545 - 4	>35 N/mm2	>47 N/mm2
Skid Resistance (Friction Coefficient)	EN ISO - 10545 - 17	>0.4	>0.4
Breaking Strength	EN ISO - 10545 - 4	>1300 N	>1500 N
Frost Resistance	EN ISO - 10545 - 12	Frost Proof	Frost Proof
Thermal Shock Resistance	EN ISO - 10545 - 9	No Damage	No Damage
Moisture Expansion	EN ISO - 10545 - 10	NIL	NIL
Resistance To Surface Abrasion	EN ISO - 10545 - 7	Abrasion class shall be specified by the manufacturer	PEI IV & V
CHEMICAL PROPERTIES			
Chemical Resistance	EN ISO - 10545 - 13	Min Class - 3	Class 5
Color Resistance	EN ISO - 10545 - 16	No Damage	No Damage
Stain Resistance	EN ISO - 10545 - 14	Resistant	Resistant

PACKING DETAILS

Dimension (MM)	Box			
	Pieces	Sq. Mtr.	Sq. Feet	Weight (Apx.)
300 x 600 MM	5	0.9	9.68	18 Kgs.
600 x 600 MM	4	1.44	15.5	26.5 Kgs.
600 x 1200 MM	2	1.44	15.5	28 Kgs.
800 x 800 MM	3	1.92	20.67	38 Kgs.





DOMINGOTM
Build the heaven... TILES

CORPORATE OFFICE

DOMINGO TILES LLP.

A-1105,RK Iconic,150 Feet ring road,
Shital park,Rajkot-360006,Gujarat,India.

info@domingotiles.com
www.domingotiles.com
+91 90332 07040

Follow us on :   



FOR MORE
DETAIL SCAN
HERE